

- Step 9** Select the cam which suits your door and frame and attach it to the square shaft at the end of the spindle.
- Step 10** Now check the operation of the lock using the factory Master Code 2,4,6,8.
- Step 11** If the lock is functioning correctly, CHANGE THE DEFAULT MASTER CODE (2,4,6,8) and program the lock using the programming instructions enclosed.

B) New installation

- Step 1** Place template on door and mark upper 6mm hole and lower 16mm hole.

IMPORTANT NOTE: Before drilling fixing holes, please ensure that the position of the cabinet lock when fitted will allow enough clearance for selected cam to work.

- Step 2** Drill both fixing holes.
- Step 3** Continue installation from step 4 to 11, above.



CODELOCKS

**CABINET
LOCK
ELECTRONIC**

CODELOCKS LTD UK
Tel: +44 (0) 1635 239645
Fax: +44 (0) 1635 239644
sales@codelocks.co.uk
Helpline, service & spares
FREEPHONE 0800 393 405

CODELOCKS CHINA
Tel: +86 757 8660 1981-3
Fax: +86 757 8660 1980
sales@codelocks.cn

CODELOCKS US
Tel: +1 714 979 2900
Fax: +1 714 979 2902
sales@codelocks.us
Help: 1.877.CODELOCK


www.codelocks.com

Installation Instructions

FITTING INSTRUCTIONS

The Cabinet Lock can be fitted to:

- A) Cupboards, cabinets and lockers etc as a direct replacement for existing cam locks.
- B) It can also be easily fitted to cupboards and cabinets that do not have an existing locking device.

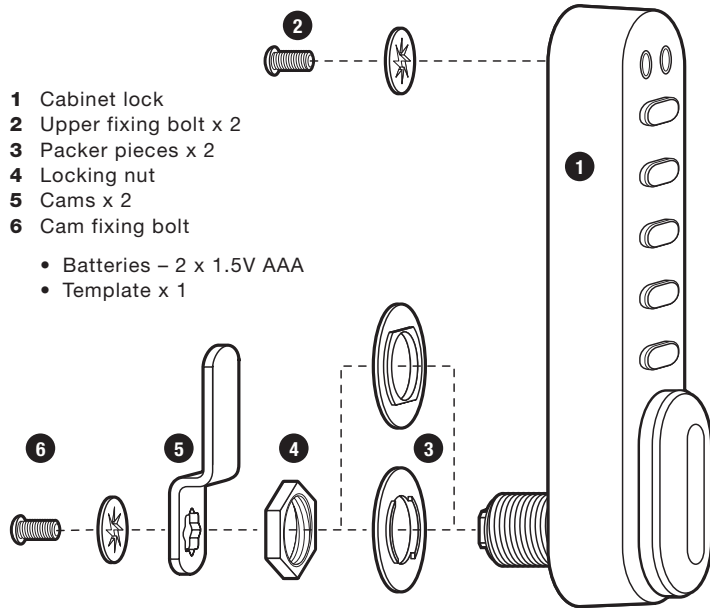

SPECIAL NOTES

- Before installing the lock, load the batteries and familiarise yourself with the operation and programming.
- The handle will not turn until you enter the factory default Master Code 2,4,6,8.
- Please see programming guide to set your own codes.

INSTALLATION GUIDE

A) Replacing existing cam lock with the Cabinet Lock

- Step 1** Remove existing cam lock.
- Step 2** Place template over hole left by cam lock and mark upper fixing hole.
- Step 3** Drill the 6mm upper fixing hole.
- Step 4** Fit the Cabinet Lock to the door by passing the spindle through the 16mm hole.
- Step 5** If required, from the inside of the door, pass either of the packing pieces over the spindle to centralise the lock.
- Step 6** Now secure the lock by threading the large nut onto the spindle.
- Step 7** Fit one of the upper fixing bolts to suit your door thickness.
- Step 8** Tighten the lower fixing nut and upper bolt.